

# DBH1 - DBH10

## Duplex Multi Bag housings

792-3962


gpm

3000-15,000

L/min

150 psi

10 bar

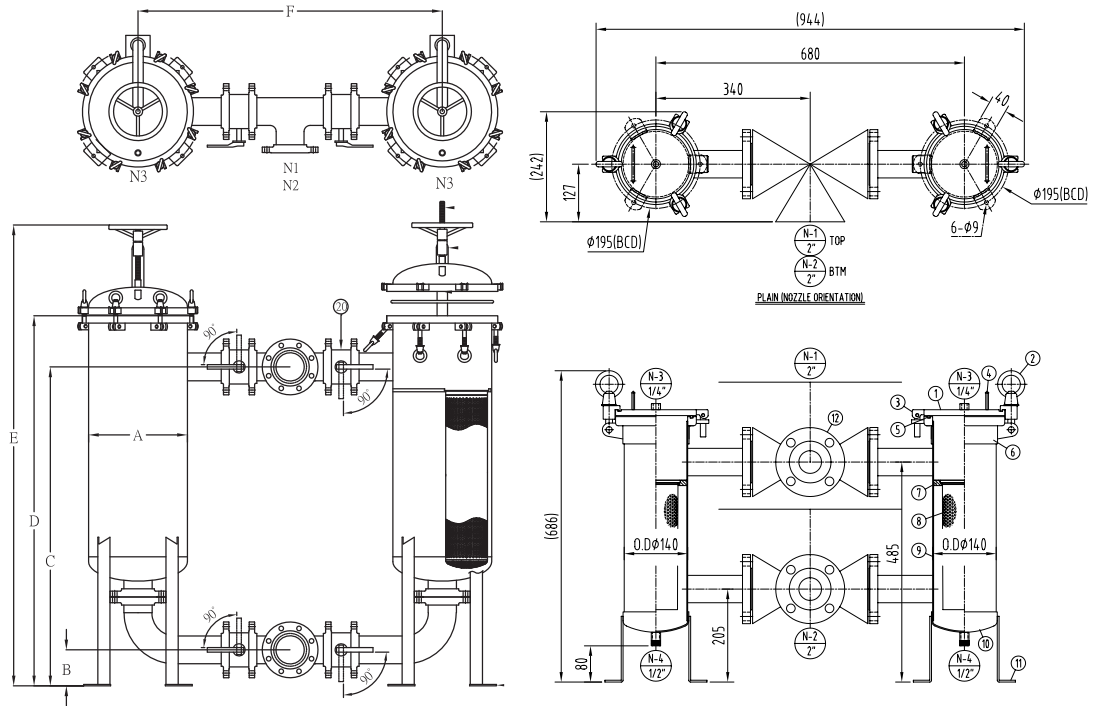

### Dimensions

A	B	C	D	E	F	G	N1	N2	N3
Inches	Inches	Inches	Inches	Inches	Inches	Inches			
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)			
16	6	52	60	75	49	20	Inlet 3 /	Outlet 3 /	Vent .5 /
(406)	(148)	(1310)	(1520)	(1893)	(1250)	(516)	150P SORF	150P SORF	PT F

### Specifications

Max. Working Pressure: 150 psi (10 bar)

Max. Working Temperature: 167°F (75°C)

Support Legs: Adjustable

Lid Closure: Swing Bolts

# Duplex Multi Bag Housings

**DBH1 - DBH10**

BH1  
100 psi

BH1  
150 psi

BH2-  
BH10

**DBH1-  
DBH10**

Micron- Rated/  
OAB

PPH/PPA

BR

**Filter  
Model  
Number  
Selection**

How to Build a Valid Model Number for a Duplex Bag Housing, 150 psi:

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6	BOX 7
DBH						

Example: NOTE: One option per box

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6	BOX 7	
DBH	4	2	304S	4F	E	1	= DBH42304S3FE1

BOX 1	BOX 2	BOX 3	BOX 4
Filter Series	Number of Bags Per Housing	Bag Size	Material
DBH	1 2 3 4 6 8 10	2	304S = 304 Stainless Steel 316S = 316 Stainless Steel 316L = 316L Stainless Steel

BOX 5	BOX 6	BOX 7
Connection Size	Seal Material	Pressure Rating
2F = 2" Flange (2, 3, 4, and 6 bags) 3F = 3" Flange (2, 3, 4, and 6 bags) 4F = 4" Flange (2, 3, 4, 6, and 8 bags) 6F = 6" Flange (4, 6, 8, and 10 bags) 8F = 8" Flange (8 and 10 bags) 10F = 10" Flange (10 bags)	E = EPDM V = Viton	0 = 100 psi 1 = 150 psi

Filter and Media are sold separately.